



SMART SCANING TECHNOLOGY

Total Safety is now offering Kiosk Personnel Management Solution that features check-in and body temperature verification capabilities. The solution can also be programmed for facial identification, with users easily added in a few short clicks.


Designed to help protect the health and safety of both employees and guests by preventing anyone with an elevated temperature from entering the facility. Alarms can be added to sound when individuals with an elevated temperature or those without access attempt to enter.

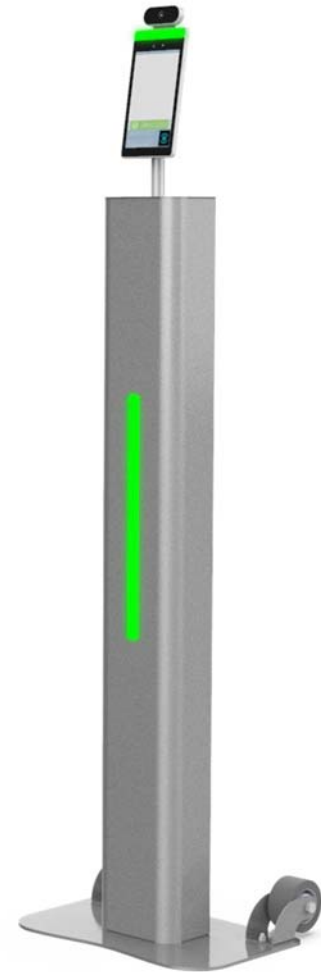

Available Configurations

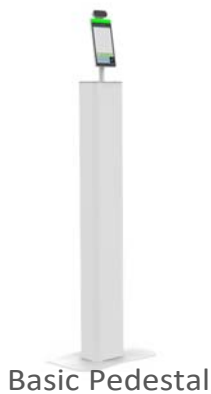

Basic Pedestal

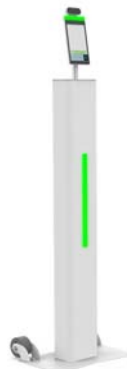

Pedestal with Optional Battery, LED & Casters

SPECIFICATIONS

CAMERA	
Resolution	2 million pixels
Type	Binocular wide dynamic camera
Aperture	F2.4
Focusing Distance	50 ~ 150cm
White Balance	Auto
Photo Flood Light	LED and IR dual photo flood light

SCREEN	
Size	8.0 in. IPS LCD screen
Resolution	800 x 1280
Touch	Not supported (optional support)


PROCESSOR	
CPU	RK3288 quad-core (optional RK3399 six-core, MSM8953 eight-core)
Storage	EMMC 8G

INTERFACE	
Network Module	Ethernet and Wireless (WIFI)
Audio	2.5W / 4R Speakers
USB	1 USB OTG, 1 USB HOST standard A port
Serial Communication	1 RS232 serial port
Relay Output	1 open door signal output
Wiegand	One Wiegand 26/34 output, one Wiegand 26/34 input
Upgrade Button	Support Uboot upgrade button
Wired network	1 RJ45 Ethernet socket

FUNCTION	
Credit Card Reader	None (Optional IC card reader, ID card reader)
Face Detection	Supports detection and tracking of multiple people at the same time.
Face Library	Up to 30,000
1: N Face Recognition	Support
1:1 Face Comparison	Support
Stranger Detection	Support
Identify Distance Configuration	Support
UI Interface Configuration	Support
Upgrade Remotely	Support
Interface	Interfaces include device management, personnel / photo management, record query, etc.
Deployment Method	Support public cloud deployment, privatized deployment, LAN use, standalone use

INFRARED THERMAL IMAGING MODULE	
Temperature Detection	Support
Temperature Detection Distance	1 Meter (optional distance 0.5 meter)
Temperature Measurement Accuracy	≤ ± 0.9°F
Temperature Measurement Range	50°F ~ 107.6°F
Thermal Field of View	89.6 x 89.6°
Abnormal Temperature Alarm	Support (temperature alarm value can be set)

GENERAL PARAMETERS	
Power	DC12V (±10%) Optional Battery: 50,000 mah / 185 wh
Operating Temperature	32°F ~ 140°F
Storage Temperature	-4°F ~ 140°F
Power Consumption	13.5W (Max)
Installation Method	Wall Mount, Pole Mount, or Pedestal
Size	Height: 67" Width: 19.5" Depth: 12" (Without Casters), 15.14" (With Casters)

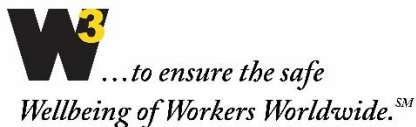

Contact: Clint Palermo
 Phone: 281.812.5936
 Email: cpalermo@totalsafety.com